



Alitas swing (age 6-12 years)

Ref. KC4004

Last check: 01/02/2020

Pag. 1/3

EN-1176-1: 2018

EN-1176-2: 2017+AC: 2019



SERIE
ANIMALS
SERIES



Technical information.

Structure: Legs in pine wood autoclaved level IV. Steel beam with electrogalvanized and finished treatment in baked paint.

Seat: In high-density polyethylene with aluminum core.

Chains: In galvanized steel.

Screws: In zinc plated steel, M8.

Anchors: Steel plates with epoxy paint finish.

Technical data.

Assembly: 2 pers. 1 hour.

Weight: 170 Kg.

Total height: 2,51 m.

Free fall height: 1,35 m.

Safety area: 26,54 m².

Biggest piece dimension: 2,35 m.

Spare pieces availability: 3 years.



C/ Foia, 13
P.I. Alquería
de Moret
46210 Picanya
(Valencia)



+34 963 313 677



kiwi@kiwipw.com



kiwiplaygrounds.com

The company reserves
the right to perform
any modification or
change in their products.

COMPLEMENTS



Alitas swing (age 6-12 years)

Ref. KC4004

Last check: 01/02/2020


Pag. 2/3

EN-1176-1: 2018

EN-1176-2: 2017+AC: 2019




SERIE
ANIMALS
SERIES

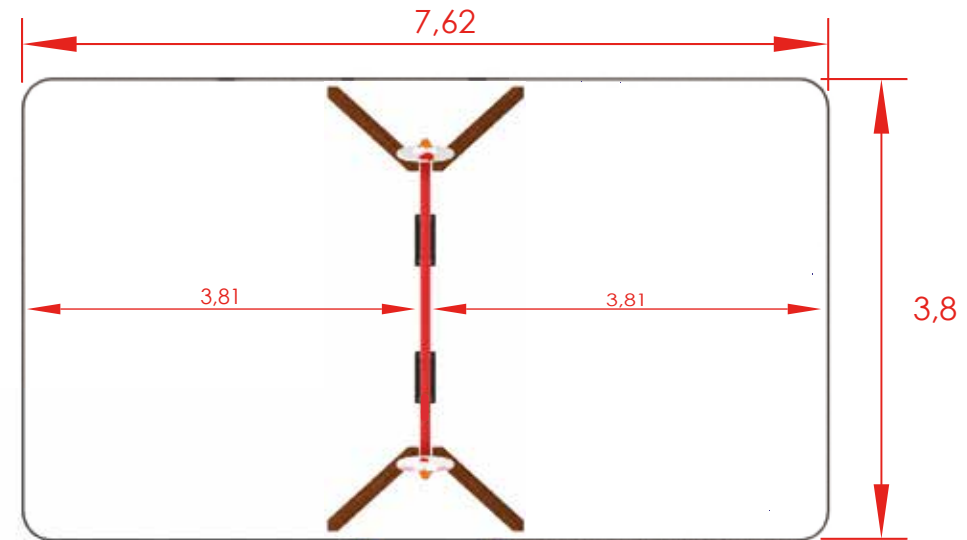

Safety area: 26,54 m²

General dimensions (mm.)

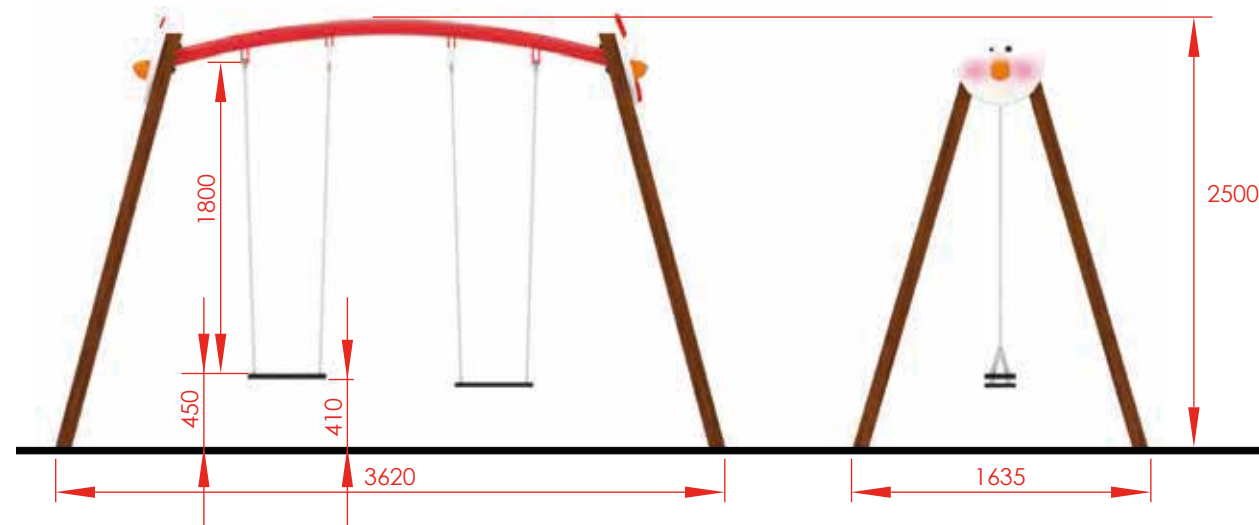

C/ Foia, 13
P.I. Alquería
de Moret
46210 Picanya
(Valencia)



+34 963 313 677



kiwi@kiwipw.com




kiwiplaygrounds.com

The company reserves
the right to perform
any modification or
change in their products.

COMPLEMENTS



SERIE ANIMALS SERIES

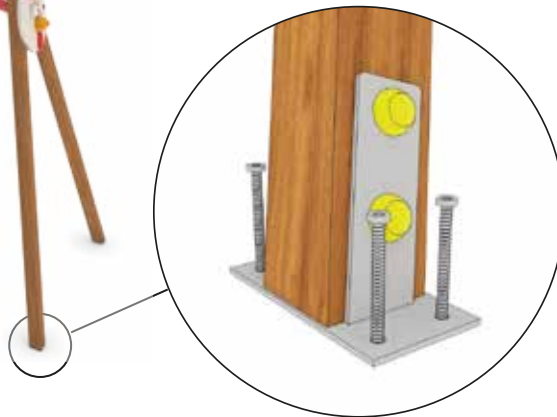

Anchoring detail



C/ Foia, 13
P.I. Alquería
de Moret
46210 Picanya
(Valencia)



+34 963 313 677




kiwi@kiwipw.com



kiwiplaygrounds.com

The company reserves
the right to perform
any modification or
change in their products.

Dimensions of the concrete slab.

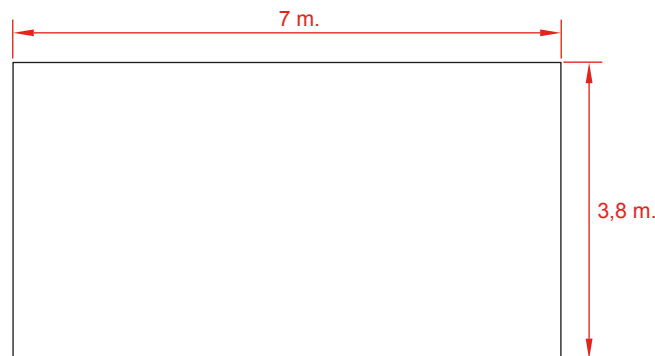

Installation.

Screwed to concrete floor using expansion plugs or threaded rod and epoxy. Finished with compacted material coating either continuous wet-pour rubber surfacing or rubber tiles.

Maintenance:

Checking: all fixing points, screws and bolts must be periodically checked and tightened again if necessary. The checking date must be annotated in order to establish a control.

Inspections:

1. Routine visual inspection. An eye and functional inspection will be performed to verify that you have not suffered any vandalism damage.
2. Functional inspection. This inspection will be carried out with a periodicity of 1 to 3 months and attention should be paid to the components "sealed for life" and the equipment whose stability depends on a post.
3. Annual inspection. A complete inspection of the whole set will be carried out in order to verify that it meets all the sections of the standard and that it has not been modified.

