The Turtle (age 3-12 years)









C/ Foia, 13 P.I. Alquería de Moret 46210 Picanya (Valencia)



+34 963 313 677



@ kiwi@kiwipw.com



kiwiplaygrounds.com

The company reserves the right to perform any modification or change in their products.





The Turtle (age 3-12 years)

Special projects

Technical information

Animal: Build in polyester painted by mass, with gel-coat of predominant colour and anti-graffiti treatment.

Surface: Stepable zone realized in high resistance continuous wet-pour rubber surfacing (EPDM).

Anchoring: Galvanized Steel for mounting on

concrete foundation.





C/ Foia, 13 P.I. Alguería de Moret 46210 Picanya



(Valencia)

Technical data


Assembly: 2 pers. 4 hours.

Weight: 500 Kg. Total high: 2,4 m.

Free fall height: 1,00 m. Safety area: 53,88 m².

Biggest element dimensions: 3 m. Spare parts disponibility: 3 years.

Safety area: 53,88 m²

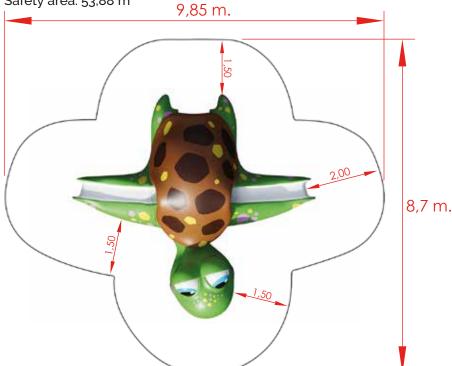









The Turtle (age 3-12 years) Ref. KZM4000

Installation:

Anchored to the concrete floor with expansion bolts all around the perimeter using the base tab. Finished with compacted material coating either continuous wet-pour rubber surfacing or rubber tiles.

Maintenance:

Checking: all fixing points, screws and bolts must be periodically checked and tightened again if necessary. The checking date must be annotated in order to establish a control.

Inspections.

- 1. Routine visual inspection. An eye and functional inspection will be performed to verify that you have not suffered any vandalism damage.
- 2. Functional inspection. This inspection will be carried out with a periodicity of 1 to 3 months and attention should be paid to the components "sealed for life" and the equipment whose stability depends on a post.
- 3. Annual inspection. A complete inspection of the whole set will be carried out in order to verify that it meets all the sections of the standard and that it has not been modified.



