

Curved ladder (age 6-12 years)
Ref KP4018

RN:MRLS SERIES

## Technical information.

Structure: Manufactured in Ø40 mm. curved tubular steel. Welded to anchor plate. Steps in Ø30 mm. curved tubular steel.

Finishes: Baked paint in various colors.

Technical data.

Assembly: 2 pers.


Weight: 75 Kg.

Total height: 1,48 m.

Free fall height: 1,5 m.

**Dimensions:** h1,48 x 1,79 x 0,6 m.



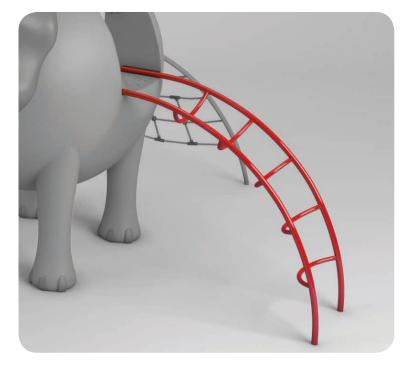

Installation example.

# ACCESSORIES





### Installation.

Anchored to the animal module with 4 screws and to the floor with 2 expansion bolts. Finished with compacted material coating either continuous wet-pour rubber surfacing or rubber tiles.


## Maintenance:

Checking: all fixing points, screws and bolts must be periodically checked and tightened again if necessary. The checking date must be annotated in order to establish a control.

# Inspections:

- 1. Routine visual inspection. An eye and functional inspection will be performed to verify that you have not suffered any vandalism damage.
- 2. Functional inspection. This inspection will be carried out with a periodicity of 1 to 3 months and attention should be paid to the components "sealed for life" and the equipment whose stability depends on a post.
- 3. Annual inspection. A complete inspection of the whole set will be carried out in order to verify that it meets all the sections of the standard and that it has not been modified.

# General dimensions (mm.)

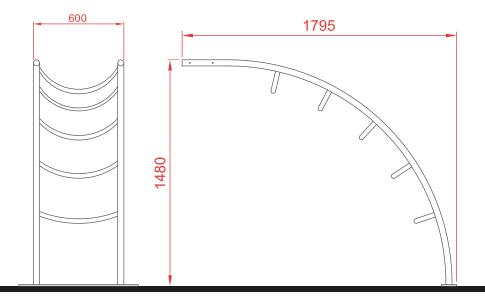





C/Foia, 13 P.I. Alquería de Moret 46210 Picanya (Valencia)



+34 963 313 677





The company reserves the right to perform any modification or change in their products.