



Technical information.

and galvanized steel chains.

Structure: Manufactured in Ø90 mm. curved tubular steel. Welded to anchor plate. Finishes: Baked paint in various colors. Swing: Injected rubber seat with aluminum reinforcement

Technical data. Assembly: 2 pers. Weight: 175 Kg. Total height: 2,54 m. Free fall height: 1,35 m.

Dimensions: h2,54 x 3,15 x Ø 0,09 m.





C/ Foia, 13 P.I. Alquería de Moret 46210 Picanya (Valencia)








The company reserves the right to perform any modification or change in their products.







Ref. KP4016

Swing (age 6-12 years)

Installation.

Anchored to the animal module with 6 screws and to the floor with 4 expansion bolts. Finished with compacted material coating either continuous wet-pour rubber surfacing or rubber tiles.


Maintenance:

Checking: all fixing points, screws and bolts must be periodically checked and tightened again if necessary. The checking date must be annotated in order to establish a control.

Inspections:

- 1. Routine visual inspection. An eye and functional inspection will be performed to verify that you have not suffered any vandalism damage.
- 2. Functional inspection. This inspection will be carried out with a periodicity of 1 to 3 months and attention should be paid to the components "sealed for life" and the equipment whose stability depends on a post.
- 3. Annual inspection. A complete inspection of the whole set will be carried out in order to verify that it meets all the sections of the standard and that it has not been modified.

General dimensions (mm.)

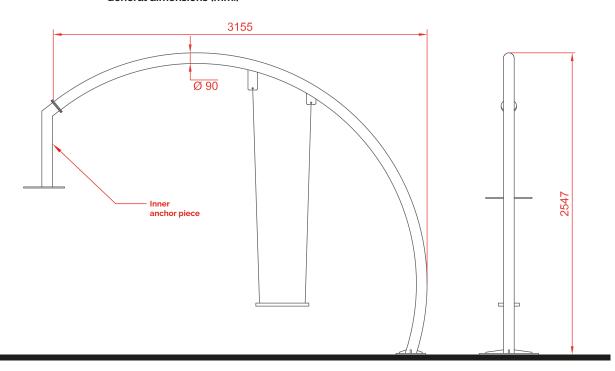





C/ Foia, 13 P.I. Alquería de Moret 46210 Picanya (Valencia)



+34 963 313 677



kiwi@kiwipw.com



kiwiplaygrounds.com

The company reserves the right to perform any modification or change in their products.